

GENERAL FEATURES

- **TORK series S8110 direct acting drain solenoid valves are 2/2 way normally closed and have small body size.**
- **The standby and drainage periods can be regulated by the timer on itself. It is attached to the part of the valve which is drained. The valve is opened to drain on time which the timer is programmed.**
- **On request; normally open types**
- **Suitable for non-aggressive liquids (water, light oil (2E) etc...), gaseous fluids (air, inert gases etc...)**
- Working temperature: -10°C / +80°C
- Not suitable for use with dangerous fluids listed in Group 1
- **Don't require any differential pressure to operate**
- Compact and low weight valve enabling easy and quick installation
- High reliability, quality and performance; long life, corrosion resistance
- Wide pressure ratings, range of flow rate and orifice options
- **On request; solenoid valve can have 1 mounting hole at the bottom of the body.**
- Ideal for the automatic control of media in a wide range of applications.
- TORK solenoid valves satisfy relevant 97/23/EC, Pressure Equipment Directive (PED) and 2006/95/EEC Low Voltage Directive (LVD).
- Some applications; separator main drainage
- Coils interchangeable
- Flow factor Kv of each valve is indicated, so that the flow Q can be calculated as a function of pressure
- Solenoid valves must be used with filtered fluids.
- Solenoid valve can be mounted in any position without affecting operation; vertical with coil upwards preferred.
- Standard pipe connection is G (BSP) (ISO 228-1) and on request; other pipe connections are available (NPT (ANSI 1.20.3))

ELECTRICAL CHARACTERISTICS

- Continuous Duty : ED %100
- Coil Insulation Class : H (180°C)
- Coil Impregnation : Polyester Fiber Glass
- Coil Encapsulation Material : Fiber Glass Reinforced
- Ambient Temperature : from -10°C; +60°C
- Protection Degree : IP 65 (EN 60529) with coil duly fitted with the plug connector
- Electric Plug Connection : DIN 46340 3-poles connectors (DIN 43650)
- Connector Specification : ISO 4400 / EN 175301-803, Form A, Spade plug (Cable Ø6-8 mm)
- Electrical Safety : IEC 335
- Standard Voltages : For AC 12V, 24V, 48V, 110V, 230V
For DC 12V, 24V, 48V, 110 V


- Other voltages on request;
- Voltage Tolerances : For AC -15%; +10%, For DC -5%; +10%
- Frequency : 50 Hz , other frequencies on request; (60 Hz)
- On request; connector with LED
- Specify coil voltage with order

MATERIALS IN CONTACT WITH FLUID

- Body : Brass
- Internal Parts : Stainless Steel
- Sealing : NBR
- Shading Ring : Copper
- Seats : Brass
- Core Tube : Stainless Steel
- Springs : Stainless Steel
- On request; sealing can be FPM (VITON), EPDM



TECHNICAL FEATURES

- Max Viscosity : 5°E (~37cSt or mm²/s)
- Response Time : Opening Time:30 ms,
Closing Time :30 ms
- Maximum Allowable Pressure:30 bar
- Fluid Temperature for FPM (VITON)
from -10°C; +160°C, for EPDM
from -10°C; +140°C

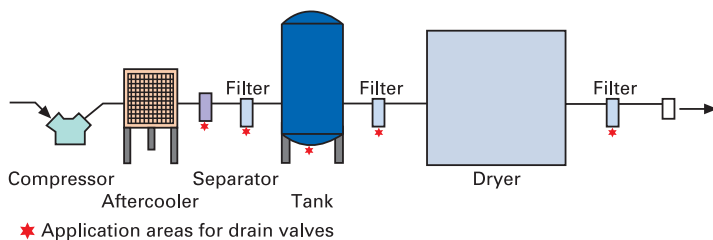

With Timer

Normally Closed

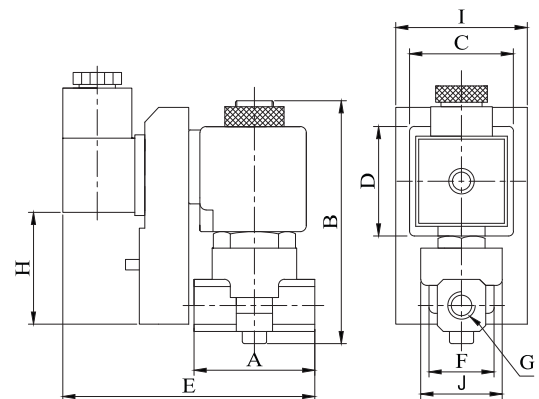

Dimensions (mm)

	G	A	B	C	D	E	F	J	H	I
1/8"	40	90	32	39	78	22.3	25.6	37.2	42.3	
1/4"	40	90	32	39	78	22.3	25.6	37.2	42.3	

Valve Type / Order no	New Valve Type / Order no	Connection Size	Orifice size	Pressure min / max		KV	Fluid Temperature		Seal	Weight
				bar	bar		min	°C max		
T-GDV	S8110	G	mm	bar	bar	lt/min	min	°C max		(kg)
T-GDV 100	S8110.00.018	1/8"	1.8	0	16	1.6	-10	80	NBR	0.36
T-GDV 101	S8110.01.018	1/4"	1.8	0	16	1.6	-10	80	NBR	0.35

Useful Informations

1 bar:14,5 PSI:10 mH₂O:10 N/cm²:1 kg/cm²:100000 Pa , 1 PSI:69 mbar,1 m³/h:4,405 GPM:16,7 L/d 1 Gallon / minute:0,227 m³/h, 0°C:89,6 F
Sealings:NBR:Nitrile-Butylene Elastomer , FPM (VITON):Fluoro-Carbon Elastomer, EPDM:Ethylene-Propylene Elastomer

B

GENERAL FEATURES

- **TORK series S8110 diaphragm drain solenoid valves are 2/2 way normally closed and pilot operated**
- **The standby and drainage periods can be regulated by the timer on itself. It is attached to the part of the valve which is drained. The valve is opened to drain on time which the timer is programmed.**
- **On request; normally open types**
- **Suitable for non-aggressive liquids (water, light oil (2E) etc...), gaseous fluids (air, inert gases etc...)**
- Working Temperature: -10°C / +80°C
- Not suitable for use with dangerous fluids listed in Group 1
- **Minimum operating differential pressure 0,5 bar**
- High reliability, quality and performance; long life, corrosion resistance
- Wide pressure ratings, range of flow rate and orifice options
- Ideal for the automatic control of media in a wide range of applications.
- TORK solenoid valves satisfy relevant 97/23/EC, Pressure Equipment Directive (PED) and 2006/95/EEC Low Voltage Directive (LVD).
- Some applications; separator main drainage
- Coils interchangeable
- Flow factor Kv of each valve is indicated, so that the flow Q can be calculated as a function of pressure
- Solenoid valves must be used with filtered fluids.
- Solenoid valve can be mounted in any position without affecting operation; vertical with coil upwards preferred.
- Standard pipe connection is G (BSP) (ISO 228-1) and on request; other pipe connections are available (NPT (ANSI 1.20.3))

ELECTRICAL CHARACTERISTICS

- Continuous Duty : ED %100
- Coil Insulation Class : H (180°C)
- Coil Impregnation : Polyester Fiber Glass
- Coil Encapsulation Material : Fiber Glass Reinforced
- Ambient Temperature : from -10°C; +60°C
- Protection Degree : IP 65 (EN 60529) with coil duly fitted with the plug connector
- Electric Plug Connection : DIN 46340 3-poles connectors (DIN 43650)
- Connector Specification : ISO 4400 / EN 175301-803, Form A, Spade plug (Cable Ø 6-8 mm)
- Electrical Safety : IEC 335
- Standard Voltages : For AC 12V, 24V, 48V, 110V, 230V
For DC 12V, 24V, 48V, 110 V


- Other voltages on request;
- Voltage Tolerances : For AC %-15; %+10, For DC %-5; %+10
- Frequency : 50 Hz , other frequencies on request; (60 Hz)
- On request; connector with LED
- Specify coil voltage with order

MATERIALS IN CONTACT WITH FLUID



- Body : Brass
- Internal Parts : Stainless Steel
- Sealing : NBR
- Shading Ring : Copper
- Seats : Brass
- Core Tube : Stainless Steel
- Springs : Stainless Steel
- On request; sealing can be FPM (VITON), EPDM

TECHNICAL FEATURES

- Max Viscosity: 5°E (~37cSt or mm²/s)
- Response Time: Opening Time: 400 ms to ~ 1600 ms, Closing Time : 1000 ms to ~ 2000 ms
- Maximum Allowable Pressure: 25 bar
- Fluid Temperature for FPM (VITON) from -10°C; +160°C, for EPDM from -10°C; +140°C

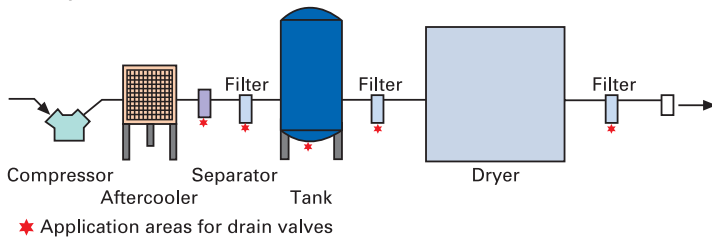

Normally Closed

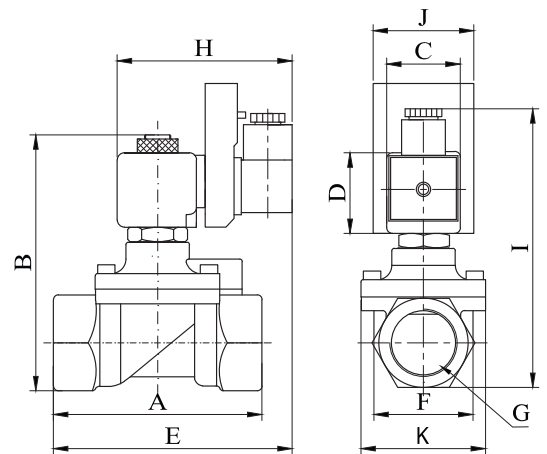

Dimensions (mm)

	G	A	B	C	D	E	F	K	H	I	J
3/8"	74	97	32	45	109.3	37.5	52	76	108	42.3	
1/2"	79	100	32	45	110	39.8	52	76	110	42.3	
3/4"	79	107,3	32	45	112	41.5	52	76	118	42.3	
1"	85	115	32	45	115	42.5	52	76	124	42.3	

Valve Type / Order no	New Valve Type / Order no	Connection Size	Orifice size	Pressure min / max		KV	Fluid Temperature		Seal	Weight
				bar	bar		min °C	max		
T-GDV	S8110	G	mm	bar	bar	lt/min	min °C	max		(kg)
T-GDV 102	S8110.02	3/8"	12.5	0.5	16	48	-10	80	NBR	0.68
T-GDV 103	S8110.03	1/2"	14.5	0.5	16	70	-10	80	NBR	0.71
T-GDV 104	S8110.04	3/4"	17	0.5	16	85	-10	80	NBR	0.8
T-GDV 105	S8110.05	1"	17	0.5	16	90	-10	80	NBR	0.97

Useful Informations

1 bar:14,5 PSI:10 mH₂O:10 N/cm²:1 kg/cm²:100000 Pa , 1 PSI:69 mbar,1 m³/h:4,405 GPM:16,7 L/d 1 Gallon / minute:0,227 m³/h, 0°C:89,6 F
Sealings:NBR:Nitrile-Butylene Elastomer , FPM (VITON):Fluoro-Carbon Elastomer, EPDM:Ethylene-Propylene Elastomer

GENERAL FEATURES

- TORK series S8180 (N.C) diaphragm drain solenoid valves are 2/2 way normally closed pilot operated
- The standby and drainage periods can be regulated by the timer on itself. It is attached to the part of the valve which it is drained. The valve is opened to drain on time which the timer is programmed.
- On request; normally open types
- Suitable for non-aggressive liquids (water, light oil (2E) etc...), gaseous fluids (air, inert gases etc...)
- Working Temperature:-10°C / +80°C
- Not suitable for use with dangerous fluids listed in Group 1
- Don't require differential pressure (for 3/8", 1/2", 3/4", 1")
- Internal exhaust system for normally open solenoid valves
- High reliability, quality and performance; long life, corrosion resistance
- Wide pressure ratings, range of flow rate and orifice options
- Ideal for the automatic control of media in a wide range of applications.
- TORK solenoid valves satisfy relevant 97/23/EC, Pressure Equipment Directive (PED) and 2006/95/EEC Low Voltage Directive (LVD).
- Some applications; separator main drainage
- Coils interchangeable
- Flow factor Kv of each valve is indicated, so that the flow Q can be calculated as a function of pressure
- Solenoid valves must be used with filtered fluids.
- Solenoid valve can be mounted in any position without affecting operation; vertical with coil upwards preferred.
- Standard pipe connection is G (BSP) (ISO 228-1) and on request; other pipe connections are available (NPT (ANSI 1.20.3))


ELECTRICAL CHARACTERISTICS

- Continuous Duty : ED %100
- Coil Insulation Class : H (180°C)
- Coil Impregnation : Polyester Fiber Glass
- Coil Encapsulation Material : Fiber Glass Reinforced
- Ambient Temperature : from -10°C; +60°C
- Protection Degree : IP 65 (EN 60529) with coil duly fitted with the plug connector
- Electric Plug Connection : DIN 46340 3-poles connectors (DIN 43650)
- Connector Specification : ISO 4400 / EN 175301-803, Form A, Spade plug (Cable Ø6-8 mm)
- Electrical Safety : IEC 335
- Standard Voltages : For AC 12V, 24V, 48V, 110V, 230V
For DC 12V, 24V, 48V, 110 V

- Other voltages on request;
- Voltage Tolerances : For AC -15%; +10%, For DC -5%; +10%
- Frequency : 50 Hz, other frequencies on request; (60 Hz)
- On request; connector with LED
- Specify coil voltage with order

MATERIALS IN CONTACT WITH FLUID TECHNICAL FEATURES



- Body : Brass
- Internal Parts : Stainless Steel
- Sealing : NBR
- Shading Ring : Copper
- Seats : Brass
- Core Tube : Stainless Steel
- Springs : Stainless Steel
- On request; sealing can be FPM (VITON),EPDM
- Max Viscosity : 5°E (~37cSt or mm²/s)
- Response Time : Opening Time: 400 ms to ~ 1600 ms,
Closing Time :1000 ms to ~ 2000 ms
- Maximum Allowable Pressure: 25 bar
- Fluid Temperature for FPM (VITON)
from -10°C; +160°C, for EPDM
from -10°C; +140°C

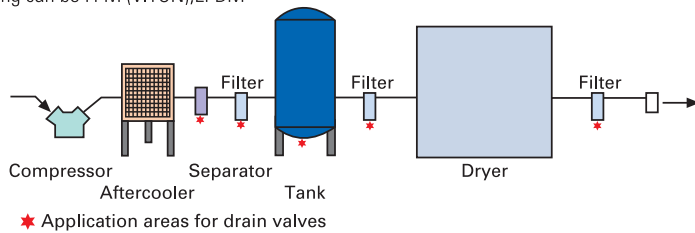

Normally Closed

With Timer

DON'T REQUIRE ANY DIFFERENTIAL PRESSURE

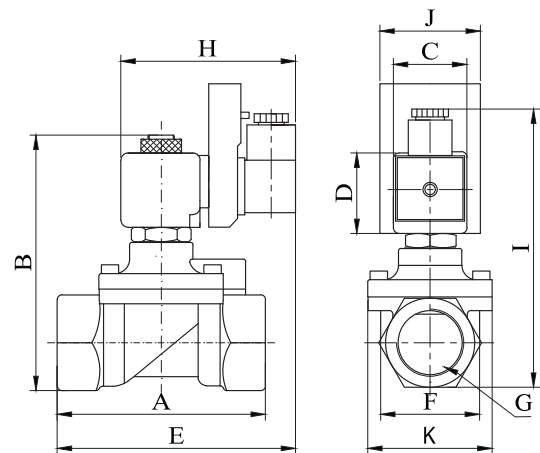

Dimensions (mm)

	G	A	B	C	D	E	F	K	H	I	J
3/8"	74	97	32	45	109.3	37.5	52	76	108	42.3	
1/2"	79	100	32	45	110	39.8	52	76	110	42.3	
3/4"	79	107,3	32	45	112	41.5	52	76	118	42.3	
1"	85	115	32	45	115	42.5	52	76	124	42.3	

Valve Type / Order no	New Valve Type / Order no	Connection Size	Orifice size	Pressure min / max		KV	Fluid Temperature		Seal	Weight
				bar	bar		min	°C max		
T-GZ.DV	S8180	G	mm			lt/min				
T-GZ.DV 102	S8180.02	3/8"	12.5	0	16	48	-10	80	NBR	0.69
T-GZ.DV 103	S8180.03	1/2"	14.5	0	16	70	-10	80	NBR	0.72
T-GZ.DV 104	S8180.04	3/4"	17	0	16	85	-10	80	NBR	0.8
T-GZ.DV 105	S8180.05	1"	17	0	16	90	-10	80	NBR	0.98

Useful Informations

1 bar:14,5 PSI:10 mH₂O:10 N/cm²:1 kg/cm²:100000 Pa , 1 PSI:69 mbar,1 m³/h:4,405 GPM:16,7 L/d 1 Gallon / minute:0,227 m³/h, 0°C:89,6 F
Sealings:NBR:Nitrile-Butylene Elastomer , FPM (VITON):Fluoro-Carbon Elastomer, EPDM:Ethylene-Propylene Elastomer