Series 1, 3, 4 and VMS manually operated valves

Series 1, 3 and 4: 3/2, 5/2 and 5/3-way CC CO CP

Ports G1/8 - G1/4 Series VMS: 3/2-way

Ports G1/8 - G1/4 - G3/8 - G1/2





Series 3 manual valves (G1/8) and Series 4 (G1/4), 3/2 - 5/2-way and 5/3way, are available with several devices designed to satisfy different needs. The 3/2-way valves Series 3 and 4 are normally closed when 1 is the inlet; they can also be normally open when 3 is the inlet. Series 3 and 4 5/2-way valves can be supplied via the ports 3 and 5 with two different pressures, if a cylinder has to be operated using a delivery pressure which is different from the return pressure. Series 1 is provided with two devices: pushbutton (3/2-way) and lever (3/2 and 5/2-way).

GENERAL DATA

Construction spool-type (Series 3 and 4) - poppet-type (Series 1) - slide (Series VMS)

Valve group 3/2 - 5/2 - 5/3 way/pos.

Materials aluminium body, stainless steel spool, NBR seals

PortsG1/8 - G1/4Ambient temperature $0^{\circ}C \div 60^{\circ}C$ Medium temperature $0^{\circ}C \div 50^{\circ}C$ Operating pressuresee models


Fluid


Filtered air, without lubrication. If lubricated air is used, it is recommended to use ISO VG32 oil.

Once applied the lubrication should never be interrupted.

CODI	NG EXAMPLE					
3	3	8		-	900	
3	SERIES: 1 3 4					
5	FUNCTION: 3 = 3/2-way NC 5 = 5/2-way CC 6 = 5/3-way CC 7 = 5/3-way CO					
8	PORTS: 8 = G1/8 4 = G1/4					
900	RESETTING: 895 = pushbutton, monostable, bla 896 = pushbutton, monostable, gre 897 = pushbutton, monostable, rec 900 = lever, bistable 905 = lever, monostable 915 = knob, bistable 915 = knob, monostable 935 = digital monostable 976 = palm-switch, monostable, bl 976 = palm-switch, monostable, gre 977 = palm-switch, monostable, re 990 = switch, bistable	een I ack een				








Mod.	Operating pressure (bar)	Flow rate (NI/min)	Actuating force (N)
338-990	0.9 ÷ 10	700	18





Actuating force = 18N Operating pressure = $-0.9 \div 10$ bar Flow rate = 700 NI/min.




Mod. 358-990



Valves

Actuating force = 35N Operating pressure = -0,9 ÷ 10 bar Flow rate = 700 NI/min.


Mod.	Colors	
338-895	Black	
338-896	Green	
338-897	Red	



Valves

Actuating force = 35N Operating pressure = -0,9 ÷ 10 bar Flow rate = 700 NI/min.

Mod.	Colors	
358-895	Black	
358-896	Green	
358-897	Red	






Valves

Actuating force = 35N Operating pressure = -0,9 ÷ 10 bar Flow rate = 700 NI/min.

Mod.	Colors	
338-975	Black	
338-976	Green	
338-977	Red	





2



Valves

Actuating force = 35N Operating pressure = -0,9 ÷ 10 bar Flow rate = 700 NI/min.






		4		2	
	1	1,	. /	7 w	VN14
14		5	11	13	

Mod.	Colors	
358-975	Black	
358-976	Green	
358-977	Red	

A PARTY AND A PART

Valves

338-910 Actuating force = 6N 338-915 Actuating force = 35N Operating pressure = -0,9 ÷ 10 bar Flow rate = 700 NI/min.




12(10) (3)	10(12) 12(10) 1(3) 1(3) 1(3) 1(3)	12(10) 1(3) 3(1)	VN06
------------	--	------------------	------


Mod.	Symbol	
338-910	VN03	
338-915	VN06	



Valves

358-910 Actuating force = 6N358-915 Actuating force = 35NOperating pressure = $-0.9 \div 10$ bar Flow rate = 700 NI/min.







C₹





Valves

338-910 Actuating force = 6N 338-915 Actuating force = 35N Operating pressure = $-0.9 \div 10$ bar Flow rate = 700 NI/min.












Mod.	Symbol	
338-900	VN08	
338-905	VN11	

Valves

358-900 Actuating force = 5N 358-905 Actuating force = 22N Operating pressure = -0,9 ÷ 10 bar Flow rate = 700 NI/min.










Mod.	Symbol
358-900	VN16
358-905	VN17

Valve

Actuating force = 5N Operating pressure = $-0.9 \div 10$ bar Flow rate = 500 NI/min.








Mod.

368-900





Actuating force = 20N Operating pressure = $-0.9 \div 10$ bar Flow rate = 500 NI/min.




Mod.



Valve

Actuating force = 5N Operating pressure = -0,9 ÷ 10 bar Flow rate = 500 NI/min.




Mod. 378-900




Valve


Actuating force = 20N Operating pressure = -0,9 ÷ 10 bar Flow rate = 500 NI/min.




Mod. 378-905

434-910 actuating force = 10N 434-915 actuating force = 37N Operating pressure = -0,9 ÷ 10 bar Flow rate = 1250 NI/min.






10(12)	<u> </u>	VNO3
12(10)	1(3)	3(1)



Mod.	Symbol	
434-910	VN03	
434-915	VN06	

Valves

454-910 actuating force = 10N 454-915 actuating force = 37N Operating pressure = -0,9 ÷ 10 bar Flow rate = 1250 NI/min.





DIMENSIONS		
Mod.	Symbol	
454-910	VN13	
454-915	VN14	



Valves


434-900 actuating force = 5N434-905 actuating force = 37NOperating pressure = $-0.9 \div 10$ bar Flow rate = 1250 NI/min.

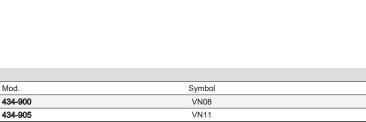





454-900 actuating force = 5N 454-905 actuating force = 37N Operating pressure = -0,9 ÷ 10 bar Flow rate = 1250 NI/min.




Mod.	Symbol
454-900	VN16
454-905	VN17



Valve

Actuating force = 5N Operating pressure = -0,9 ÷ 10 bar Flow rate = 1250 NI/min.




Mod. **464-900**



Valve


Actuating force = 10N Operating pressure = -0,9 ÷ 10 bar Flow rate = 1250 NI/min.



Mod. **464-905**



Actuating force = 5N Operating pressure = -0,9 ÷ 10 bar Flow rate = 1250 NI/min.




Mod.

474-900



Valve

Actuating force = 10N Operating pressure = -0,9 ÷ 10 bar Flow rate = 1250 NI/min.



Mod.


474-905



Valves Series VMS

Operating pressure: 0 ÷ 15 bar Operating temperature: - 10 ÷ 80°C





Mod.	Α	ØB	L	Q* (NI/min) 1-2	Q* (NI/min) 2-3
VMS-105-M5	M5	15	33,5	140	145
VMS-118-1/8	G1/8	25	48	600	740
VMS-114-1/4	G1/4	30	58	1200	1780
VMS-138-3/8	G3/8	35	70	2100	1830
VMS-112-1/2	G1/2	40	80	3350	4030
VMS-134-3/4	G3/4	49,5	83	5350	5000




2



Valve

Actuating force at 6 bar = 38NOperating pressure = $0 \div 10$ bar Flow rate = 500 NI/min.






Mod.



Valve

Actuating force at 6 bar = 25NOperating pressure = $0 \div 10$ bar Flow rate = 500 NI/min.






Mod. 138-900



Valve

Actuating force at 6 bar = 45NOperating pressure = $0 \div 10$ bar Flow rate = 500 NI/min.





Mod. **158-900**


CONTROL






Valve

Actuating force at 6 bar = 40N Operating pressure = $0 \div 10$ bar Flow rate = 1250 NI/min.






Mod. 134-935



Valve

Actuating force at 6 bar = 30N Operating pressure = 0 ÷ 10 bar Flow rate = 1250 NI/min.




Mod. 134-900



Valve

Actuating force at 6 bar = 55N Operating pressure = 0 ÷ 10 bar Flow rate = 1250 NI/min.



Mod.

154-900