

Compact cylinders Series 32 Tandem and multi-position versions ISO 21287

New

1

Double-acting, magnetic, \varnothing 25, 40, 63, 100.



- » Compact design
- » Wide variety of models available in different diameters
- » In compliance with ISO 21287

The extreme compact Tandem version allows to obtain up to 2 times the force of a normal cylinder, while the multi-position version allows to obtain up to three positions with only one cylinder.

The cylinder Series 32 Tandem and multi-position versions are, thanks to their compactness, suitable to be installed within confined spaces. They can be used in conjunction with the same mounting elements of other standard cylinders DIN/ISO 6431/VDMA 24562 (Series 60/61).

GENERAL DATA



Construction	compact profile
Operation	double-acting, magnetic
Material	anodized aluminium body and end blocks - rolled stainless steel rod AISI 303 -anodized aluminium piston rod seal, OR end-block and piston seal in PU
Mounting	with threaded holes on the end blocks flange – feet – trunnion
Strokes min. and max. (1)	Series 32F, 32M \varnothing 25 = 5-300 mm (dimension x2)
Multiposition	Series 32F, 32M \varnothing 40 - 63 = 5-400 mm (dimension x2) Series 32F, 32M \varnothing 100 = 5-500 mm (dimension x2)
Strokes min. and max. (1)	Series 32F, 32M \varnothing 25 = 5-80 mm
Tandem	Series 32F, 32M \varnothing 40 - 63 - 100 = 5-100 mm
Operating temperature	0°C + 80°C (with dry air -20°C)
Operating pressure	1 ÷ 10 bar
Fluid	clean air, without lubrication if lubricated air is used, it is recommended to use oil ISOVG32. Once applied the lubrication should never be interrupted.
Operating speed	10 ÷ 1000 mm/sec (without load)

(1) the minimum stroke for the use of the sensors is 10 mm.

CODING EXAMPLE

32	M	2	A	040	A	050	N	2
32	SERIES: compact magnetic							
M	VERSION: M = male rod thread F = female rod thread							
2	OPERATION: 2 = double-acting							
A	MATERIALS: A = anodized aluminium body, end blocks and piston – rod seal, OR end block and piston seal in PU							
040	BORE: 25 mm 40 mm 63 mm 100 mm							
A	CONSTRUCTION A = standard							
050	STROKE in mm - tandem stroke in mm - multi-position X1mm/X2mm - insert the strokes without the initial 0 (see application schemes).							
N	Tandem and multi-position							
2	STAGES(only for tandem) 2 = 2 stages							

Operation scheme



Multi-position
Example: 32M2A040A25/75N
X1=25 X2=75 mm.

Tandem
Example: 32M2A040A050N2
Stroke 50 mm.









Tandem cylinders Mod. 32F2A/32M2A...N2

New

1



+ = add the stroke
 ++ = add the stroke two times
 1 = Groove for sensor
 2 = Positive stroke
 3 = Negative stroke

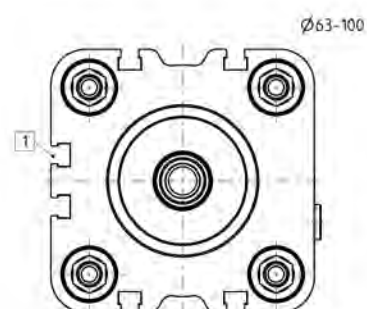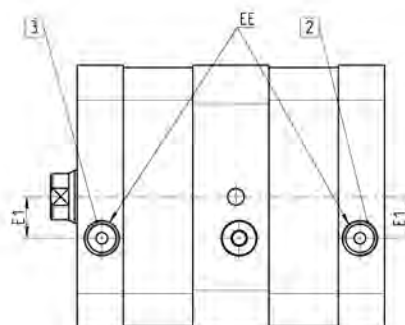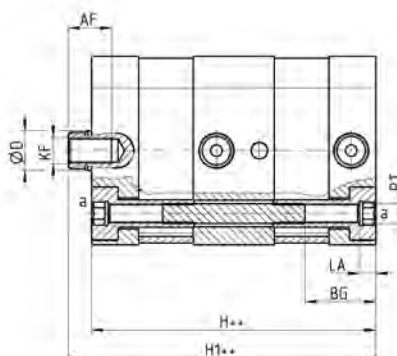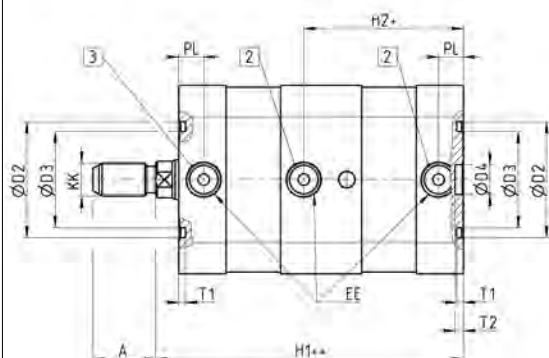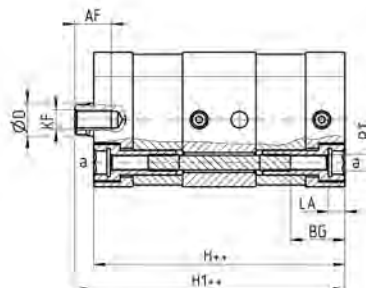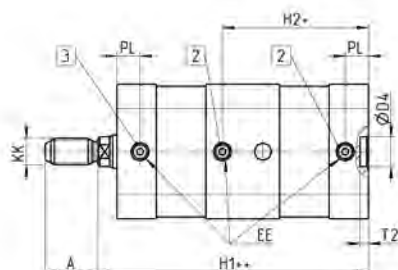

DIMENSIONS

Ø	A	AF	BG	ØD	ØD2	ØD3	ØD4	E	EE	E1	H	H1	H2	KF	KK	LA	PL	RT	SW1	T1	T2	TG
25	16	11	16,5	10	-	-	9	40,7	M5	-	76	81,7	44	M6	M8X1,25	5	7	M5	8	-	2,5	26
40	19	13	21,5	12	35	29	9	57	G1/8	-	86	93	48,2	M8	M10X1,25	5	7,6	M6	10	2	2,5	38
63	22	16	18,5	16	45	39	12	79,6	G1/8	12'5	93	101	-	M10	M12X1,25	6	7,6	M8	13	2	3	56,5
100	28	20	20	25	55	49	12	115,6	G1/8	25	121	130,7	-	M12	M16X1,5	6	8	M10	22	2	3	89

The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

1/1.31
03

Multi-position cylinders Mod. 32F2A/32M2A...X1/X2N









New

- 1 = Groove for sensor
 2 = Positive stroke cylinder 1
 3 = Positive stroke cylinder 2
 4 = Negative stroke for both cylinders



X1 = Partial stroke

X2 = Total stroke as operation scheme pag. 1.1.31.2

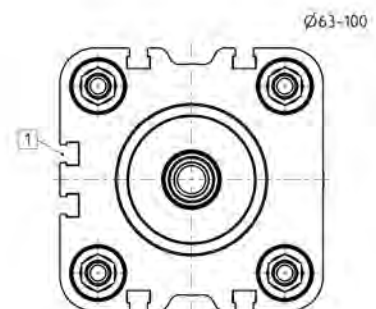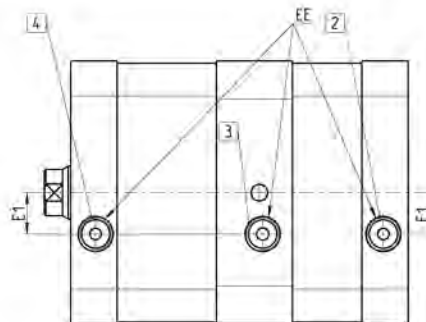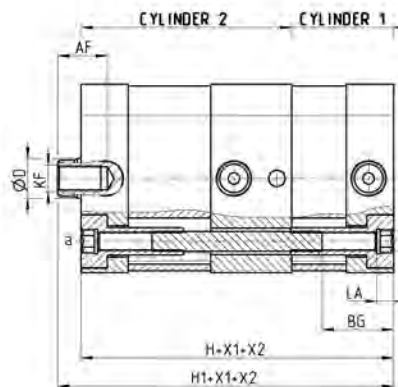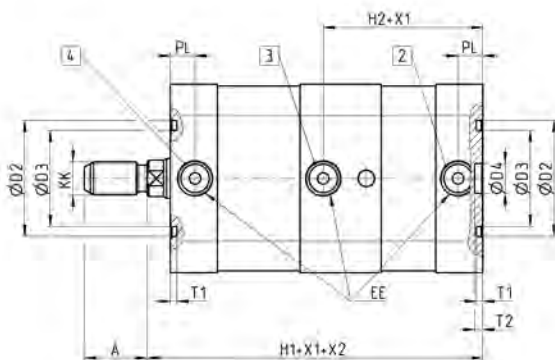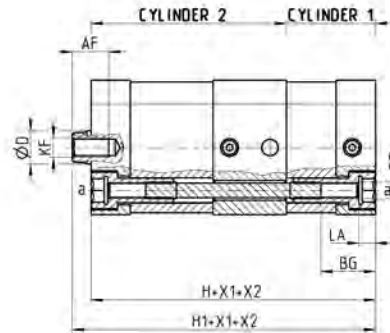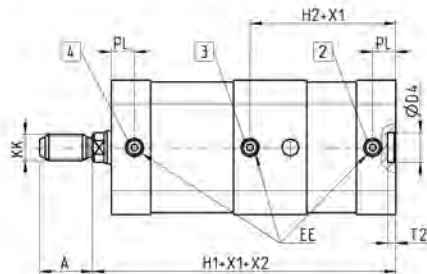

DIMENSIONS

Ø	A	AF	BG	ØD	ØD2	ØD3	ØD4	E	EE	E1	H	H1	H2	KF	KK	LA	PL	RT	SW1	T1	T2	TG
25	16	11	16,5	10	-	-	9	40,7	M5	-	76	81,7	44	M6	M8X1,25	5	7	M5	8	-	2,5	26
40	19	13	21,5	12	35	29	9	57	G1/8	-	86	93	48,2	M8	M10X1,25	5	7,6	M6	10	2	2,5	38
63	22	16	18,5	16	45	39	12	79,6	G1/8	12,5	93	101	44	M10	M12X1,25	6	7,6	M8	13	2	3	56,5
100	28	20	20	25	55	49	12	115,6	G1/8	25	121	130,7	60,5	M12	M16X1,5	6	8	M10	22	2	3	89